

DECLARATION OF PERFORMANCE

In accordance with Regulation (EU) No 305/2011 of the European Parliament and of the Council laying down harmonised conditions for the marketing of construction products (CPR EU 305/2011)

No. HF22 003 01-02-16

1. Unique identification code of the product-type:

Fibre Cement Flat Sheet

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

HardieFloor® (22mm)

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

Fibre cement structural flooring board

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

**James Hardie Pty
10 Colquhoun Street
Rosehill
NSW 2142
Australia**

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

**James Hardie Building Products Ltd.
One Fleet Place
London EC4M 7WS
United Kingdom**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

Level 4

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:

Type testing carried out by:

James Hardie Pty Ltd. 10 Colquhoun St, Rosehill NSW 2142, Australia

Reaction to fire tested by:

EXOVA WARRINGTONFIRE. Holmesfield Road, WA1 2DS, Warrington, United Kingdom

Notified Body no. 0833

Classification report no. 334538 dated 25/10/13

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

N/A

9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.


General Property	Unit or Characteristic	Result	Test Method
Dimensional tolerances		Level 1	EN 12467:2012
Flexural Strength	Saturated/Equilibrium MPa	>7MPa/>14MPa	
Average density	Saturated, g/cm ³	1.08	
Water Impermeability	Physical Observations	Pass	
Modulus of rupture (MPa)	Saturated & EQ average	Pass	
Type, Category, Class		NT Category A Class 2	
Warm Water Evaluation		Pass	
Freeze/Thaw Resistance			
Soak/dry			
Heat/Rain Resistance			
Surface Burning Characteristics	Fuel Contributed	A2fl	
	Smoke Development Index	s1	
	Flames Droplets Index	d0	
Release of dangerous substances		NPD	

10. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Mr Wouter Eckelmans – General Manager Europe

Amsterdam, 1 February 2016

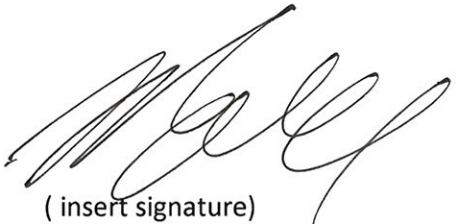

(insert signature)