



**OVERVIEW**


HardieFloor®

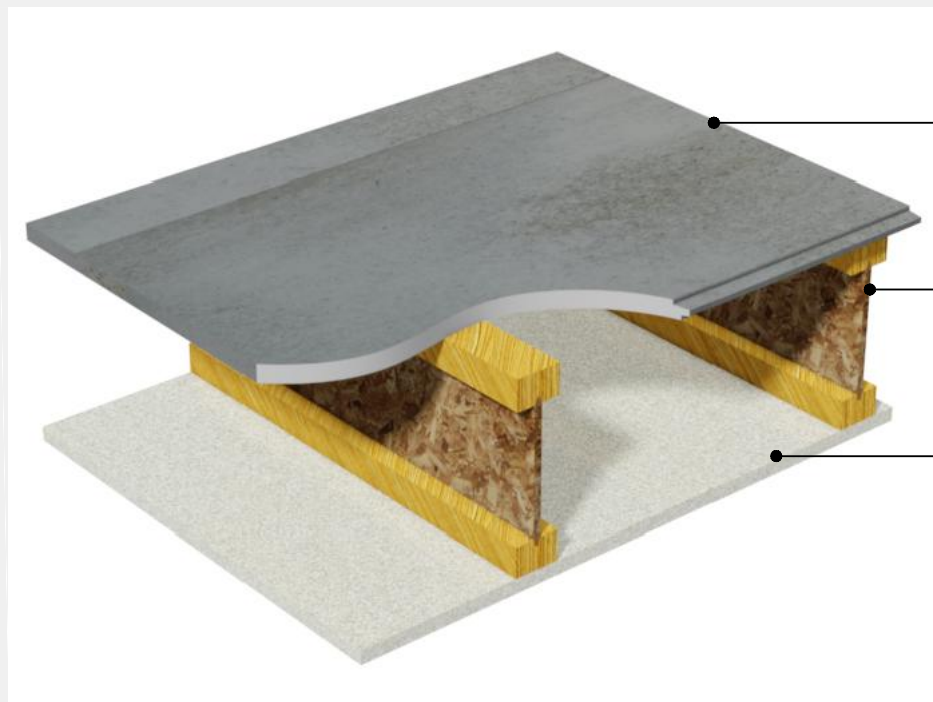

HardieFloor dB®

HardieFloor®  
HardieQStrip®HardieFloor dB®  
HardieQStrip®
**HardieFloor® Flooring (22mm & 19mm)**
**Direct to Timber Floor I-Joist**


**Floor Decking** HardieFloor® Flooring.  
( Size: 22 x 500 x 2400mm )  
( Size: 19 x 500 x 2400mm )

**Joists**

Timber I-joists at 600mm max spacing  
22mm HardieFloor® only.  
(450mm max joist spacing for 19mm)

**Ceiling**

Ceiling lining to comply with national  
building regulations reaction to fire  
requirements.

**HardieFloor® Flooring (22mm & 19mm)**
**Direct to Solid Timber Floor Joist**


**Floor Decking** HardieFloor® Flooring.  
( Size: 22 x 500 x 2400mm )  
( Size: 19 x 500 x 2400mm )

**Joists**

Solid Timber joists at 600mm max  
spacing 22mm HardieFloor® only.  
(450mm max joist spacing for 19mm)

**Ceiling**

Ceiling lining to comply with national  
building regulations reaction to fire  
requirements.

- Tile directly without the need for an overlay
- Highly effective with wet under-floor heating conducting heat up to 30% more efficiently than timber
- Weather resistant, won't warp, rot or squeak
- Robust, Durable concrete feel under foot